



LWS

LAMINATED WOOD SYSTEMS

E-LAM LIGHT STANDARDS

Designed to enhance walkways, parking lots, and any space in need of a touch of warmth and elegance, the E-LAM Light Standards combines the natural beauty of laminated wood with sophisticated lighting. Ideal for creating inviting and well-lit environments, these standards bring both functionality and charm to your projects. Illuminate your spaces with a touch of class and warmth with E-LAM Light Standards.

E-LAM LIGHT STANDARDS

Standard Sizing

Pole ID Number	L (FT)	AGL (FT)	SD (FT)	X (in.)	Y (in.)	EPA (ft ²)	Pole Cap
LSP-30-5.0-130	30.0	25.0	5.0	6¾	5½	2.4	LSP-D13
LSP-24.5-4.5-130	24.5	20.0	4.5	5.0	5½	2.4	LSP-D10
LSP-19-4.0-130	19.0	15.0	4.0	5.0	4¾	2.4	LSP-D9
LSP-15.5-3.5-130	15.5	12.0	3.5	5.0	4¾	4.6	LSP-D9

- Custom lengths and sizes are available upon request
- Standards are designed with a 130mph wind loading
- Appearance grade per customer request


E-LAM light standards are available in a wide variety of standard design configurations and are manufactured in accordance with ANSI A190.1 and treated per AWPA U1 & T1. Standard treatment is DCOI, and we can also supply CCA upon request.

E-LAM light standards are engineered and manufactured to the same high level of quality and strength that has made E-LAM the benchmark in the industry.

Lighting the Way...Naturally!

- Can be direct embed or pylon mounted
- Proven History
- Renewable Resource
- Quick Delivery
- Low Cost
- Aesthetically Pleasing
- Long Life, Low Maintenance

E-LAM Light Standards Accessories

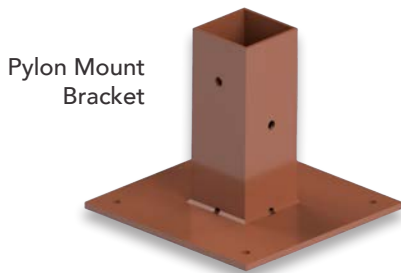


Pylon Mount Bracket





LSP Pole Cap

Series "LSP"

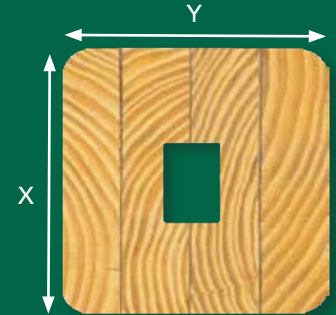

- 3/8" radius corners
- Constant Cross Section
- Internal Raceway Top to Bottom (Y) 1" x (X) 1 1/4"
- Raceway Entrance 1'6" off Ground Line

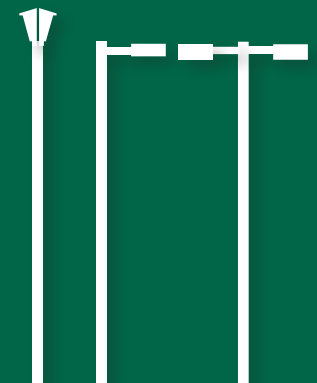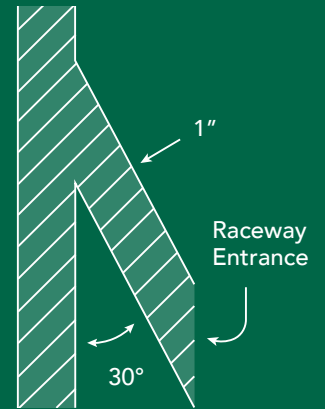

Standard mounting configurations include top mount, side mount, and double mount.